
• TOTAL NITROGEN

# EZ Series: Continuous Monitoring of Total Nitrogen

**Key Applications: Monitoring of surface water, wastewater treatment** 

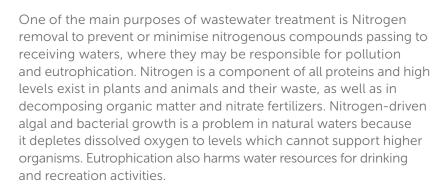

# **Features EZ Series Analysers**

- Continuously monitor Total Nitrogen to detect trends, peaks, and gain insights for process optimisation
- Accurate at low levels starting at 100 μg/L
- Multiple stream analysis (1-8 streams)
- In-line sample digestion capability
- Alternative models available to also monitor Total Phosphorus



**Watch the Video** 

**Get Product Info** 

**More Resources** 

Explore the full range of parameters and technologies. Call your Hach representative today, or visit hach.com/ez-series



# The Why, Where and How of Total **Nitrogen Monitoring**

### **About**

The Earth's atmosphere is 78% N<sub>2</sub> and Nitrogen is a key compound of amino acids. Important processes in the Nitrogen cycle include fixation, ammonification, nitrification, and denitrification. However, these processes have been negatively impacted by human activity; resulting for example in raised levels of nitrogenous compounds in natural waters. The most important Nitrogen species are Ammonia (NH<sub>3</sub>), Nitrate (NO<sub>3</sub>), Nitrite (NO<sub>2</sub>) and organic Nitrogen; all of which play important roles in biological wastewater treatment.

## **TN in Surface Waters**

Nitrogen enters surface water from atmospheric deposition, wastewater treatment plants and in runoff, especially in agricultural areas where manure and Nitrate fertilisers are present. In 2011, the US Environmental Protection Agency (EPA) said: "Nitrogen and phosphorus pollution has the potential to become one of the costliest and most challenging environmental problems we face." Nutrients Policy is one of five key focus areas for the Association of Clean Water Administrators, which seeks to achieve nutrient reduction in the nation's waters, and publishes States' progress in the Nutrients Reduction Progress Tracker – see www.acwa-us.org.

In Europe, the main objective of the Water Framework Directive (WFD) is Good Ecological Status for inland water bodies. This is supported by the Nitrates Directive which protects water resources against nitrates from agricultural sources. The WFD does not provide specific nutrient concentration targets but requires member states to determine nutrient criteria to support the achievement of good ecological status.

### TN in Wastewater

Wastewater treatment plants are point sources of nutrient pollution. Depending on the population equivalent and the sensitivity of the receiving water, the environmental permits of wastewater treatment plants may therefore require the monitoring of Total Nitrogen (TN), by manual sampling or continuous monitoring.

The US Clean Water Act section 402 and Code of Federal Regulations establish the framework for the National Pollutant Discharge Elimination System (NPDES), requiring permits for any point source discharge of pollutants to US waters. This includes municipal and industrial wastewater treatment plants, animal feeding operations, storm sewers etc. Standards for total nitrogen in discharges are set and monitored by state and federal organisations. In addition, State Regulatory Programs for Water Reuse frequently require the monitoring of Total Nitrogen in reclaimed water.

In Europe, the WFD is supported by the Urban Waste Water Treatment Directive (UWWTD) which requires member states to control emissions of nitrogen from point sources.

Sampling for lab analysis can be time-consuming, costly, and incurs a delay, whereas continuous monitoring of Total Nitrogen helps plant operators to understand the process conditions that affect nutrient levels so that they can optimise treatment and improve environmental performance.

# **TN Monitoring Solutions**

EZ Series online analysers are available in several models:

| EZ76xx | Total Nitrogen & Total Phosphorus  |
|--------|------------------------------------|
| EZ770x | Total Nitrogen                     |
| EZ7750 | Total Nitrogen & Nitrate & Nitrite |

### **Options**

- Selection of measuring ranges to match your application
- Monitoring of up to 8 sample streams per analyser, reducing cost per sampling point

